




# FULLY POWERED PALLET TRUCK



**PANTHER MAXI** 

PANTHER MAXI INOX

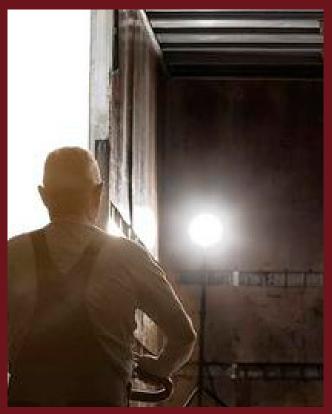







### Optimizes the working conditions

Fully powered pallet trucks are recommended for heavy pallet transportation.

Fully powered pallet trucks have electric lifting, lowering and propulsion, which ensure a high le-

vel of efficiency at the work place and a high level of safety for the operators. The Panther Maxi is a powerful pallet truck with a strong construction and high capacity. It also comes in a stainless steel version.



#### **Panther Maxi**

The Panther Maxi a powerful pallet truck with focus on efficiency and safety for the operator.

With the fully powered propulsion and a capacity of 4000 lbs, the Panther Maxi is an ideal solution if you need to transport heavy pallets from A to B. It works quickly and efficiently and is a valuable helper in a safe and productive working environment.

Oftentimes, space is an issue around production sites, and it can be difficult to move around and access pallets. The Panther Maxi is designed with respect for this issue, as it has a very compact design and in combination with the possibility to operate with the handle upright, it works very well in confined areas.

The fully powered propulsion ensures limited physical effort for the operator, and he or she can easily and safely transport pallets with heavy loads or fragile items without compromising on own safety or productivity.

We use a special oil for all products, which is tested in cold atmospheres down to at least -10 degrees C.

#### **STANDARD FEATURES**

- ✓ Motor brake
- Foot protector



#### **Panther Maxi Inox**

If you need a strong solution for pallet transportation in dry, clean and hygienic environments, the Panther Maxi Inox is a perfect solution.


It is constructed of high-quality stainless steel (AISI 316L for fork chassis) and for the purpose of easy cleaning and high sanitation, it has closed forks and rounded corners.

The surface of the forks is very smooth and easy to wipe off with a cloth.

\*Please refer to our lnox brochure for further information.





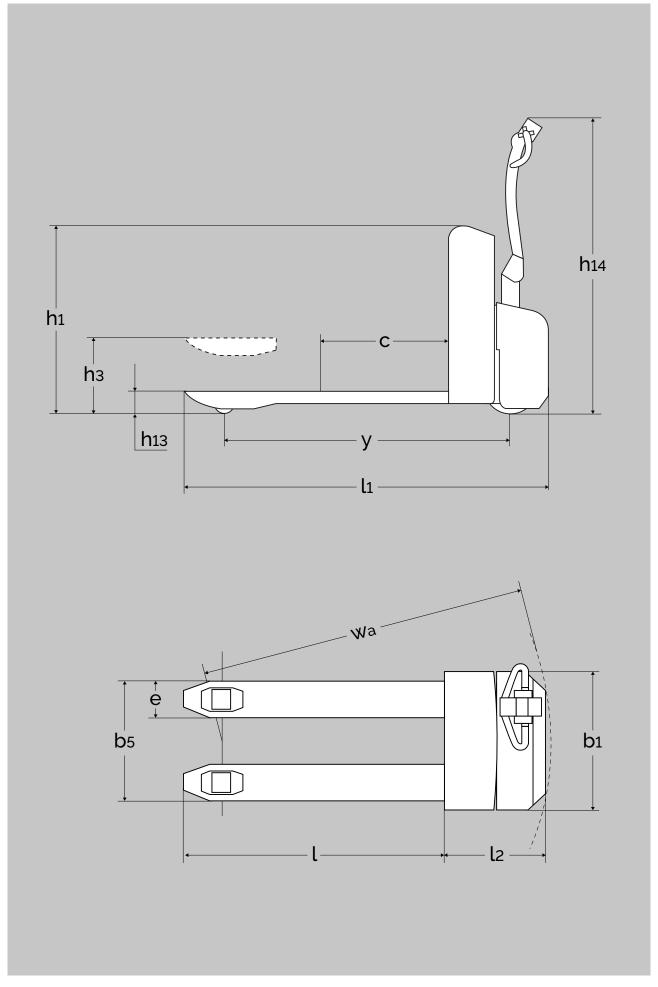

PRODUCT (measured in inch)		PANTHER MAXI
Capacity in lbs		4000 lbs
Lifting height	h <sub>3</sub>	8
Fork length	ι	32, 36, 38, 42, 45, 48, 60
Overall height	h <sub>1</sub>	32,25
Overall width b <sub>5</sub> = 20.5/27	<b>b</b> <sub>1</sub>	23.5/27
Fork span	<b>b</b> <sub>5</sub>	20.5, 27
Fork width	е	6.25
Length without forks	l <sub>2</sub>	17.75
Overall length	$l_1$	17.75 + l
Overall height	h <sub>14</sub>	51
Lowered height	h <sub>13</sub>	3.35
Load centre	С	V2
Wheel base (l=45)	У	49.5
Gangway	A <sub>st</sub>	74.5 (pallet: 47 x 31.5)*
Turning angle of the wheels		210°
Turning radius Wa (l=45)		55.5
Driving motor		24 V 1,2 kW
Driving speed with/without load		3.1/3.7 mph
Pump motor		24 V 1,2 kW
Lifting speed with/without load		1.5"/2" per sec
Lowering speed with/without load		4.5"/1.5" per sec
Gradient performance (3300 lbs)		10%
Weight in lbs with 45" forks (without battery)		451 bs

<sup>\*</sup>Tests show that 63.5" are enough.









## **Quality Ergonomic Lifting Equipment**

**Logitrans US Inc** (888) 345-1270 sales@logitrans.com www.logitrans.com





